CROCODILE

ACRYLIC SEAL PLUS

CROCODILE

Joint Filling

Highly Adhesive

Anti-fungus Additive

Fast Setting

Paintable



CROCODILE ACRYLIC SEAL PLUS

Acrylic Sealant (Sanitized) White

- Fast setting and highly adhesive
- Anti-fungus additive
- Moisture and water resistant
- Paintable


- For concrete, wood, ceramic, plastered wall, synthetic wood -

CROCODILE ACRYLIC SEAL PLUS

Acrylic Sealant (Sanitized) White

"Instant special grade acrylic sealant"



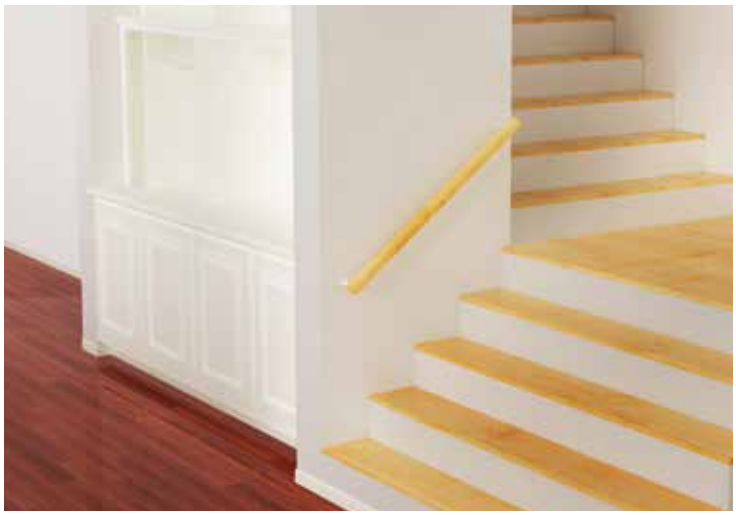



Usage Area

Crocodile Acrylic Seal Plus is specifically formulated for gaps and joints where expansion and contraction can cause rigid fillers to crack or fall out. It is suitable for interior applications such as windows and door frames, joint between wooden (or aluminum frame) and cement wall, built-in furniture installation, sanitary appliance installation, filling joint between floor and wall, etc.

Application Instruction

Substrate Preparation

- The substrate must be clean, dry, dust-free and without any traces of oil, laitance, curing compound etc.
- Joint sizes may range from 3-12 mm in width and 5-10 mm in depth. The width should be wider but smaller than the depth, for better elongation. Bond breaker may be used to adjust the depth/width ratio.


Application



Cut off the nozzle tip at 45-degree angle and position the cartridge in a manual or air powered caulking gun.




Tape up both sides of the joint to prevent overfilling.



Squeeze out to fill the joint.



Wipe off the excess sealant with wet rag or sponge.



Remove the masking tapes within 10-15 minutes before it cures.



Leave it for 24 hours before use or painting.

Estimated Coverage

- 3 meters per cartridge (for 1x1 cm joint width)

Packing

- 450 grams

Color

- White / Brown / Cherry / Oak

Product Information

+66 (0) 2720 1112 JorakayPage www.jorakay.co.th

10 Krungthepkreetha Road, Tab Chang Subdistrict, Sapan Sung District, Bangkok,10250, Thailand

U.S.A. Standard from the Crocodile Family

Jorakay Corporation Co., Ltd.